

AZ934

20 AMP SUB-MINIATURE POWER RELAY FOR AUTOMOTIVE USE

FEATURES

- Low cost
- Up to 20 Amp switching capability in a compact size
- Sealed
- Two separate relays in DPDT version
- Quiet operation
- Vibration and shock resistant
- Designed for power windows, power seats and wiper applications
- QS-9000 Factory



CONTACTS

Arrangement	DPDT (2 Form C) SPDT (1 Form C)
Ratings	Max. switched power: 280 W Max. switched voltage: 100 VDC Max. switched current (make/break), continuous: 1 Form C: 25A/20A, 20A 2 Form C: 25A/20A, 20A
Material	Silver nickel, silver tin oxide available
Resistance	< 100 milliohms at 1A, 5 VDC

COIL

Power	
At Pickup Voltage (typical)	203 mW
Max. Continuous Dissipation	1.0 W 20°C (68°F) ambient
Temperature Rise	42°C (108°F) nominal coil VDC
Max. Temperature	155°C (311°F)

NOTES

1. All values at 20°C (68°F).
2. Maximum make current refers to in-rush current of lamp load.
3. Relay may pull in with less than "Must Operate" value.
4. Specifications subject to change without notice.

GENERAL DATA

Life Expectancy Mechanical Electrical	Minimum operations 1 x 10 ⁷ operations 2 x 10 ⁵ operations at 20 A 14 VDC Res.
Operate Time (typical)	3 ms at nominal coil voltage
Release Time (typical)	1.5 ms at nominal coil voltage (with no coil suppression)
Dielectric Strength (at sea level for 1 min.)	500 Vrms coil to contact 500 Vrms between open contacts
Insulation Resistance	100 megohms min. at 20°C, 500 VDC, 50% RH
Dropout	> 8.3% of nominal coil voltage
Ambient Temperature Operating Storage	At nominal coil voltage -40°C (-40°F) to 85°C (185°F) -40°C (-40°F) to 105°C (221°F)
Vibration	0.062" (1.5 mm) DA at 10–55Hz, 10 g at 55-200 Hz
Shock	30 g, 11 ms, functional
Terminals	Tinned copper alloy, P.C.
Max. Solder Temp.	270°C (518°F)
Max. Solder Time	5 seconds
Max. Solvent Temp.	80°C (176°F)
Max. Immersion Time	30 seconds
Weight	10 grams

ZETTLER electronics GmbH

Junkersstrasse 3, D-82178 Puchheim, Germany

Tel. +49 89 800 97 0
Fax +49 89 800 97 200

office@ZETTLERelectronics.com
www.ZETTLERelectronics.com

2008-04-18


AZ934

RELAY ORDERING DATA

COIL SPECIFICATIONS - DC Coil				ORDER NUMBER*	
Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Coil Resistance Ohm $\pm 10\%$	1 Form C (SPST)	2 Form C (SPDT)
6	3.6	7.5	64	AZ934-1C-6DE	AZ934-2C-6DE
12	7.2	15.0	255	AZ934-1C-12DE	AZ934-2C-12DE

*Add suffix "T" for Silver tin oxide contact material.

MECHANICAL DATA

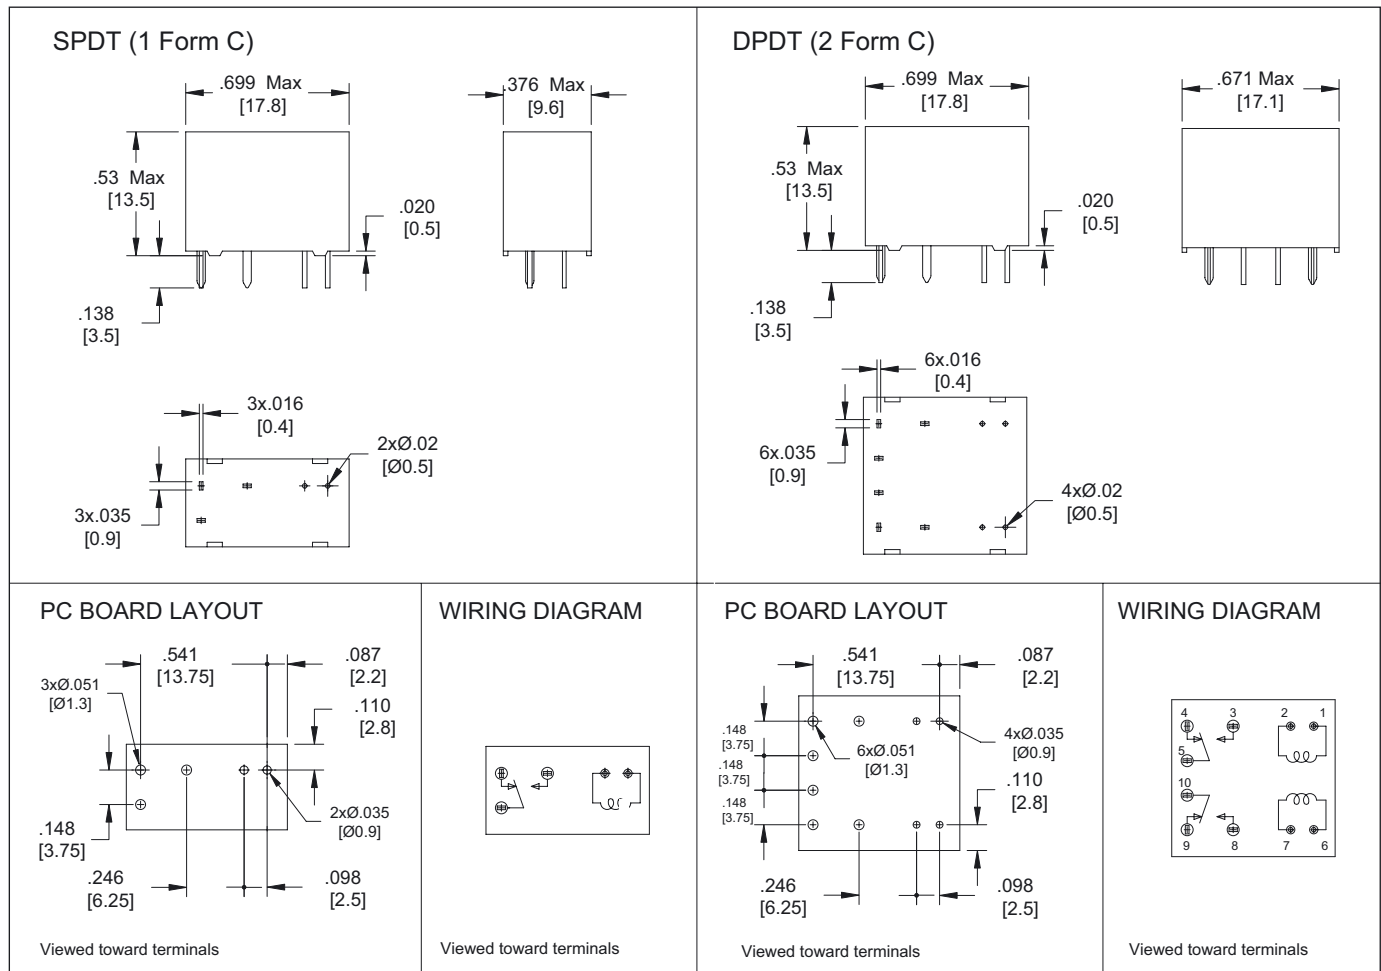

Dimensions in inches with metric equivalents in parentheses. Tolerance: ± 0.010 "

ZETTLER electronics GmbH

Junkersstrasse 3, D-82178 Puchheim, Germany

Tel. +49 89 800 97 0

Fax +49 89 800 97 200

office@ZETTLERelectronics.com

www.ZETTLERelectronics.com

2008-04-18